


HT3 Driver

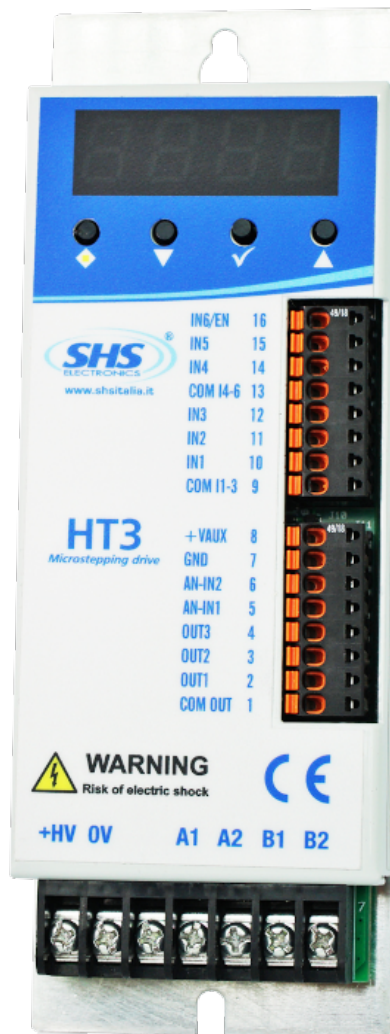

FEATURES

		H 320	H 330	H 350
Electrical Conditions	Input voltage supply	12 ... 24 Vdc	24 ... 60 Vdc	24 ... 60 Vdc
	Motor phase current	4 A	4 A	8 A
Operating Conditions	Ambient temperature	In use 0 ... 55 °C In storage -20 ... 70 °C		
	Humidity	In use 10 ... 70 % not condensing In storage 10 ... 90 % not condensing		
	Vibration resistance	0.5 G		
Functions	Steps resolution	200, 400, 800, 1600, 3200, 6400, 12800, 25600		
	Fieldbus	CanOpen - Modbus - SHS bus - USB		
	Protections	Over current, Under/over voltage, Motor phase disconnected, Over temperature, Fieldbus error, Stall detection error, Eeprom error, etc...		
	LED	Run, Error, Status		
	Diagnostic	Display of all critical operating parameters such as: Operating temperature, Input frequency etc... Status of digital and analog inputs and Fieldbus status		
	Input signals	Step in, Direction, Enable/disable, Encoder, Analog input for speed, etc...		
	Output signals	Encoder simulation, In position, Alarm etc...		

DIMENSIONS (unit mm)

