


Flexible layflat PVC hose, with polyester yarn reinforcement, resistant to elongation, for pressurized delivery of liquids in general.

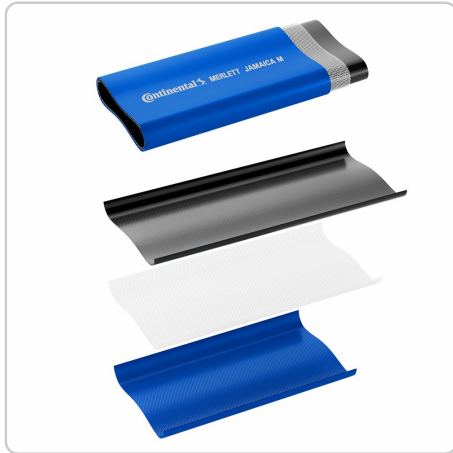

 SMOOTH SURFACE *****

 FLEXIBILITY *

 ABRASION RESISTENCE ***

 TEMPERATURE RANGE
-5 °c 60 °c

 CHEMICAL RESISTANCE
PVC Table

 CRUSHING RESISTANCE *

 MICROORGANISMS RESISTANCE *****

Ø nominal mm	Ø nominal inch	Ø i.d. mm	Ø o.d. mm	working pressure at 23° bar	working press. at 40° bar	working press. at 60° bar	bursting press. at 23° bar	total thickness mm	weight meter g/m	# wires for angle n° x a°	working resistance kg	tensile breaking load kg	coil length m	Availability
20		20	24	10	7	4	30	2	150	28x70°	110	255	50/100	In stock
25	1	25	29	10	7	4	30	2	190	28x75°	120	285	50/100	In stock
30		30	34	10	7	4	30	2	220	28x75°	165	385	50/100	In stock
32	1 1/4	32	36	10	7	4	30	2	240	28x70°	165	385	50/100	In stock
35		35	39	10	7	4	30	2	290	32x75°	180	415	50/100	On demand
38	1 1/2	38	42	10	7	4	30	2	300	32x75°	190	445	50/100	In stock
40		40	44	10	7	4	30	2	320	32x75°	205	480	50/100	In stock
45	1 3/4	45	49	10	7	4	30	2	360	36x78°	235	545	50/100	In stock
51	2	51	55	10	7	4	30	2	410	36x75°	250	575	50/100	In stock
60		60	65	8	5	3	24	2.5	550	48x78°	450	1055	50/100	In stock
63	2 1/2	63.5	68.5	8	5	3	24	2.5	570	48x78°	480	1115	50/100	In stock
70		70	75	8	5	3	24	2.5	650	48x78°	535	1245	50/100	In stock
76	3	76	81	8	5	3	24	2.5	710	60x75°	600	1390	50/100	In stock
80		80	85	8	5	3	24	2.5	750	60x76°	620	1440	50/100	In stock
90	3 1/2	90	95	8	5	3	24	2.5	860	60x80°	700	1630	50/100	In stock
102	4	102	107	8	5	3	24	3	1000	72x78°	785	1825	50/100	In stock
110		110	116	8	5	3	24	3	1150	72x80°	865	2015	50/100	In stock
127	5	127	133	6	4	2	18	3	1350	72x80°	970	2255	50/100	In stock
152	6	152	158	4	3	1	12	3	1600	72x80°	1080	2520	50/100	In stock
204	8	204	210	3	2	1	9	3	2400	120x78°	1495	3480	50	In stock