


PVC hose with rigid PVC spiral, PU underlayer and copper strand for antistatic rendering. Suitable for conveying and carrying abrasive and granular materials.

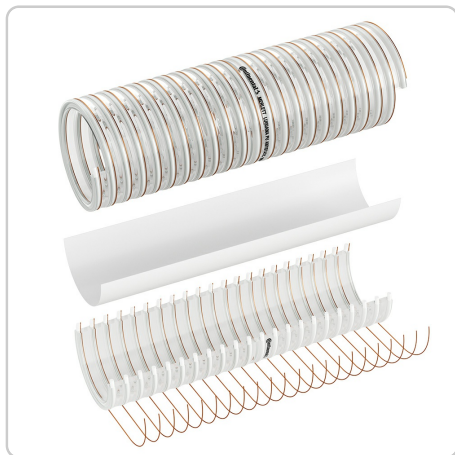

 SMOOTH SURFACE \*\*\*\*\*

 FLEXIBILITY \*\*\*

 ABRASION RESISTANCE \*\*\*\*\*

 TEMPERATURE RANGE  
-10 °c 60 °c

 CHEMICAL RESISTANCE  
PU Table

 CRUSHING RESISTANCE \*\*\*\*\*

 ANTISTATIC  
strand resistance 0.075 ohm/m

 FOR FOOD  
EU according to Declaration of Conformity.

Ø nominal mm	Ø nominal inch	Ø i.d. mm	Ø o.d. mm	working pressure at 23° bar	vacuum 23° m/H <sub>2</sub> O	bursting press. at 23° bar	bending radius mm	total thickness mm	Min depth PU mm	Ø rigid spiral (Ax8 if oval) mm	Strand Wire in 1 mt m	spiral pitch mm	spiral direction	weight meter g/m	coil length m	Availability
30		30.5	37.5	5	7	15	150	3.5	0.6	3	14	7.5	right	450	30	In stock
38	1 1/2	38	45	5	7	15	190	3.5	0.7	3	16	8	right	500	30	In stock
40		40	48	5	7	15	200	4	0.7	3.5	16	9	right	630	30	In stock
50	2	50	59	4	7	12	250	4.5	0.8	4	17	10.5	right	900	30	In stock
60		60.5	70.5	4	7	12	300	5	0.9	4.2	17	11.5	right	1100	30	In stock
70		70.5	81	4	7	12	350	5.25	0.9	4.5	19.5	12.5	right	1200	30	In stock
76	3	76.2	87.2	3.5	7	10.5	375	5.5	0.9	4.8	19	13	right	1400	30	In stock
80		80	91	3.5	7	10.5	400	5.5	0.9	5x6.3	20	14	right	1500	30	In stock
90	3 1/2	90	101	3.5	7	10.5	450	5.5	0.9	4.8	22	14	right	1750	30	In stock
100		100	111	3	7	9	500	5.5	1	5.1x5.8	23	14.5	right	2000	30	In stock
150		150	166	3	6	9	900	8	1.2	7.2x8.5	26	20	right	4100	30	On demand