

# P370 Series Valves



800.909.4988  
info@rankinusa.com

**RANKIN**   
COMPONENTS THAT AUTOMATE

## DESCRIPTION

2 way angle seat valve double effect pneumatically operated

## PRESENTATION

- High flow rate due to the angle seat configuration
- Anti-water hammer feature with the fluid entry below the seat
- Stainless steel and corrosion resistance body
- Orientable pneumatic actuator
- Self adjusting internal seal
- Optical position indicator
- Back pressure resistance capability
- Maintenance free sealing pack
- Universal mounting position




**USE:** Automation, heating, water, hot water, steam (356°F), aggressive and food fluid

**CONNECTION:** from 1/2" to 2" GAS o NPT

## VALVE FEATURES

Fluid temperature	+14°F +356°F
Ambient temperature	+14°F +176°F
Fluid viscosity	max 600 cSt
Body material	Stainless steel AISI 316
Seal	PTFE
Packing gland	PTFE/FKM

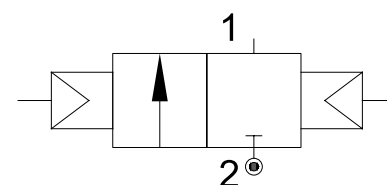

**5**

## PILOT ACTUATOR FEATURES

Fluid	Dry or lubricated air, gases and neutral fluids
Fluid temperatures	max +140°F
Body material	Polyamide 66 with 30% glass fibre
Gaskets	NBR
Actuator	Ø2.76in (Ø70mm)



CODE ①	Port Size	Orifice Size		Flow Factor Cv (gpm)	Actuator pilot pressure				Operating Pressure Differential (M.O.P.D.)				Max allowable pressure PS		Weight	
		(in)	(mm)		Min (psi)	(bar)	Max (psi)	(bar)	Min (psi)	(bar)	Max (psi)	(bar)	(psi)	(bar)	(lb)	(Kg)
P370D...W15/V	1/2	0.59	15	5.5	21.8	1.5	145	10	0	0	see pressure table (next page)	580	40	2.6	1.4	
P370E...W20/V	3/4	0.78	20	10.4										2.9	1.5	
P370F...W25/V	1	1	25	13.2										3.5	1.8	
P370G...W32/V	1 1/4	1.26	32	23.5								362	25	4.9	2.4	
P370H...W40/V	1 1/2	1.57	40	29.8										5.5	2.7	
P370I...W50/V	2	1.97	50	43										8.2	3.9	

① G= GAS (ISO228/1) Ordination example: P370FGW25/V connection G1"  
N= NPT (ANSI/ASME B1.20.1)



CE Approval

(Pressure equipment directive 2014/68/UE)  
for valves P370G\_W32 - P370H\_W40 - P370I\_W50

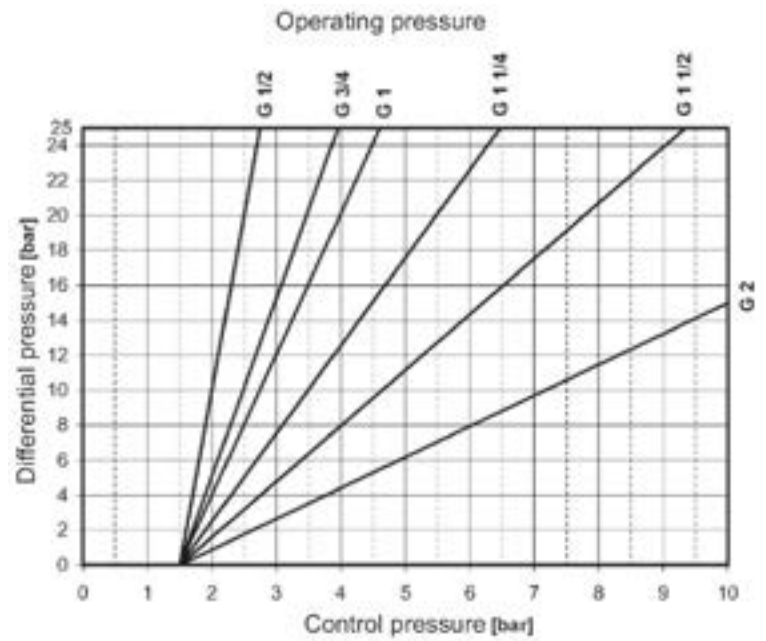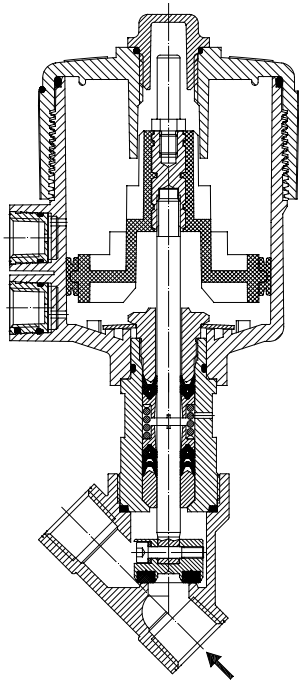

## OVERALL DIMENSION

CONNECTION GAS or NPT	A		B		C		D		H		L		T	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm
1/2	8.14	206.8	SW 1-1/16	SW 27	7	178.7	0.61	15.4	6.43	163.3	2.56	65	0.67	17
3/4	8.33	211.7	SW 1-1/4	SW 32	7.4	188.6	0.86	21.9	6.56	166.7	2.97	75.5	0.75	19
1	8.66	220.1	SW 1-5/8	SW 41	7.8	197.8	0.99	25.1	6.8	172.7	3.54	90	0.83	21
1 1/4	9.29	235.9	SW 2	SW 50	8.4	212.3	1.12	28.5	7.24	183.8	4.33	110	0.95	24
1 1/2	9.41	238.9	SW 2-1/4	SW 55	8.5	217.0	1.22	31.0	7.32	186	4.8	122	1	25.2
2	9.76	247.8	SW 2-3/4	SW 70	9	229.7	1.48	37.5	7.57	192.2	5.95	151	1.12	28.5

