

# PT10 Series D.O.T. Push-in Fittings





800.909.4988  
info@rankinusa.com

**RANKIN**   
COMPONENTS THAT AUTOMATE

<b>Material:</b>	Brass	
<b>Working Temperature:</b>	-50 ÷ 100	C°
<b>Working Temperature:</b>	-58 ÷ 212	F°
<b>Working Pressure (max):</b>	20	bar
<b>Working Pressure (max):</b>	290	psi
<b>Vacuum:</b>	-99	kPa
<b>Vacuum:</b>	29"	Hg
<b>Conformity:</b>	RoHS	

**Conformity:**  
**Conformity:**  
**Conformity:**  
**Conformity:**  
**Application**

Pneumatic circuits for truck and Trailers : Air Suspension, Braking Systems, Transmissions, locking doors and windows, Seat adjustment, Instrumentation, Air conditioning systems, horn, wiper motors, valves, cylinders and accessories

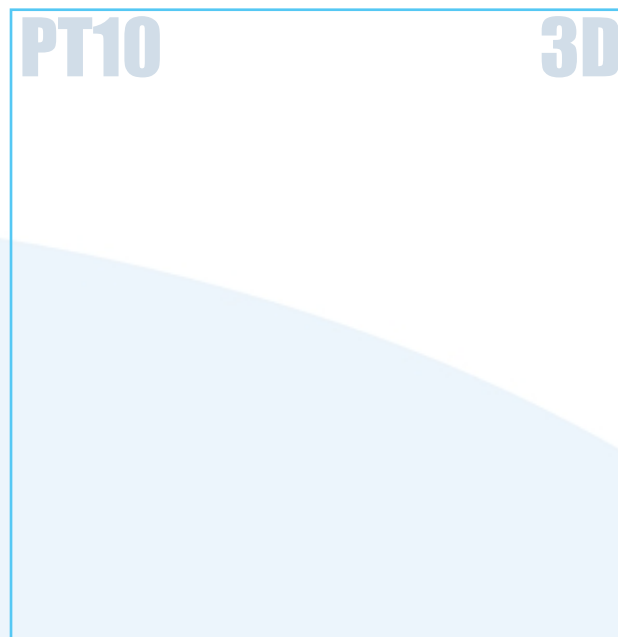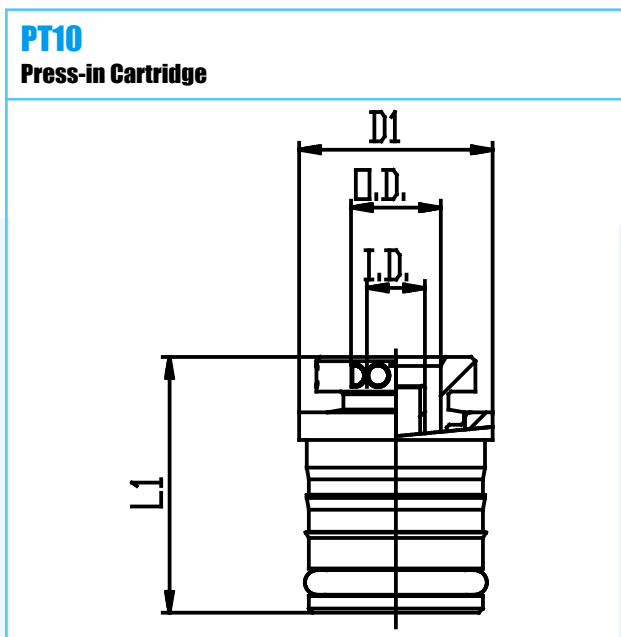

PTGFILE	CODE	TYPE	TUBEOD	TUBEID	IDIN	D1	D1IN	L1	L1IN	G	OZ	WTF	WPP	TVH
PT10	2T000010	PT10 5/32 00	5/32"	2.2	.087	10	.394	17.2	.677	-	-	-58 ÷ 212	290	29"
PT10	2T000030	PT10 1/4 00	1/4"	4.2	.165	14	.551	18.5	.728	-	-	-58 ÷ 212	290	29"
PT10	2T000050	PT10 3/8 00	3/8"	6.2	.244	17.8	.701	22.3	.878	-	-	-58 ÷ 212	290	29"