

PT14 Series D.O.T. Push-in Fittings





800.909.4988
info@rankinusa.com

RANKIN 
COMPONENTS THAT AUTOMATE

Material:	Brass	
Working Temperature:	-50 ÷ 100	C°
Working Temperature:	-58 ÷ 212	F°
Working Pressure (max):	20	bar
Working Pressure (max):	290	psi
Vacuum:	-99	kPa
Vacuum:	29"	Hg
Conformity:	RoHS	

Conformity:
Conformity:
Conformity:
Conformity:
Application

Pneumatic circuits for truck and Trailers : Air Suspension, Braking Systems, Transmissions, locking doors and windows, Seat adjustment, Instrumentation, Air conditioning systems, horn, wiper motors, valves, cylinders and accessories

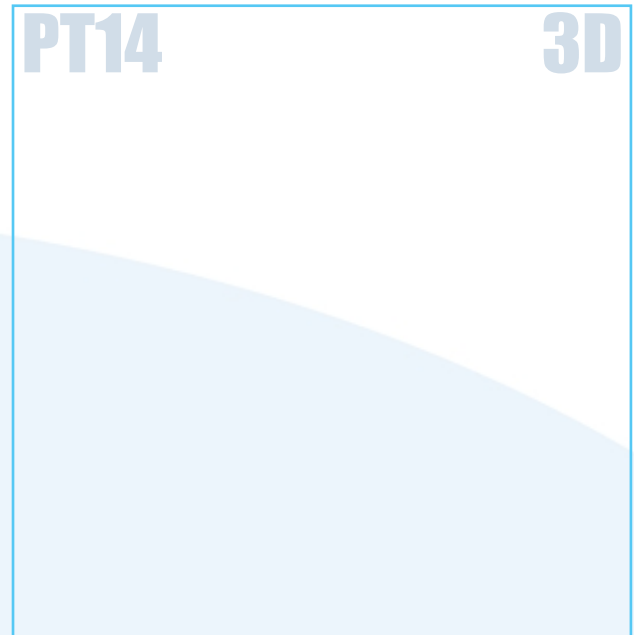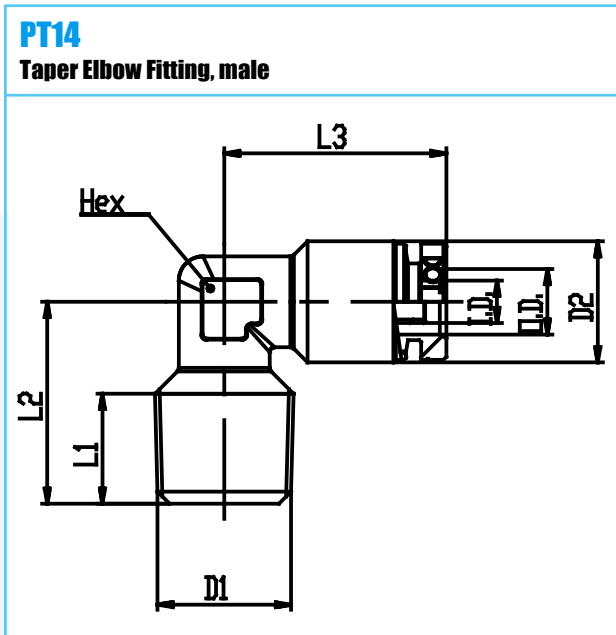

CODE	TYPE	TUBEOD	TUBEID	D1NPTF	D2	D2IN	L1	L1IN	L2	L2IN	L3	L3IN	HEX	HEXIN	G	OZ	WTF	WPP	TVH
2T040011	PT14 5/32 1/8	5/32"	2.2	1/8	9.5	.374	8.4	.331	16	.630	19	.748	10	.394	-	-	-58 ÷ 212	290	29"
2T040031	PT14 1/4 1/8	1/4"	4.2	1/8	12	.472	8.4	.331	16	.630	22	.866	10	.394	14.7	.519	-58 ÷ 212	290	29"
2T040032	PT14 1/4 1/4	1/4"	4.2	1/4	12	.472	11	.433	20	.787	22	.866	10	.394	-	-	-58 ÷ 212	290	29"
2T040052	PT14 3/8 1/4	3/8"	6.2	1/4	16	.630	12	.472	22.5	.886	26	1.024	14	.472	32.5	1.146	-58 ÷ 212	290	29"
2T040053	PT14 3/8 3/8	3/8"	6.2	3/8	16	.630	11	.433	22.5	.886	26	1.024	14	.472	35.7	1.259	-58 ÷ 212	290	29"