


# PT20-F Series D.O.T. Push-in Fittings

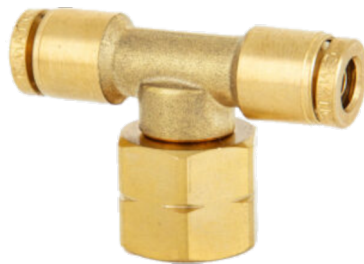


800.909.4988  
info@rankinusa.com

<b>Material:</b>	Brass	
<b>Working Temperature:</b>	-50 ÷ 100	C°
<b>Working Temperature:</b>	-58 ÷ 212	F°
<b>Working Pressure (max):</b>	20	bar
<b>Working Pressure (max):</b>	290	psi
<b>Vacuum:</b>	-99	kPa
<b>Vacuum:</b>	29"	Hg
<b>Conformity:</b>	RoHS	

**Conformity:**  
**Conformity:**  
**Conformity:**  
**Conformity:**  
**Application**

Pneumatic circuits for truck and Trailers : Air Suspension, Braking Systems, Transmissions, locking doors and windows, Seat adjustment, Instrumentation, Air conditioning systems, horn, wiper motors, valves, cylinders and accessories

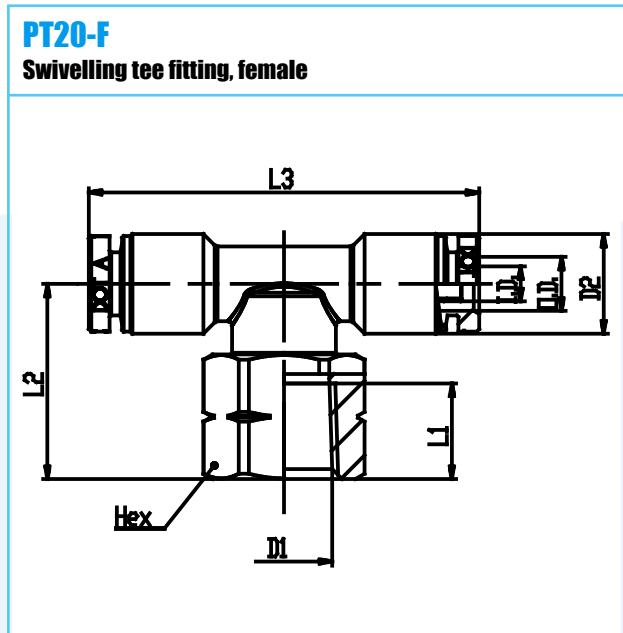

CODE	TYPE	TUBEOD	TUBEID	IDIN	D1NPTF	D2	D2IN	L1	L1IN	L2	L2IN	L3	L3IN	HEX	G	OZ	WTF	WPP	TVH
2T100032-F	PT20 1/4 1/4 -F	1/4	4.2	.165	1/4	12	.472	11.5	.453	23.7	.933	47	1.85	11/16	-	-	-58 ÷ 212	290	29"
2T100052-F	PT20 3/8 1/4 -F	3/8	6.2	.244	1/4	16	.630	11.5	.453	25.5	1.004	54	2.126	11/16	-	-	-58 ÷ 212	290	29"
2T100053-F	PT20 3/8 3/8 -F	3/8	6.2	.244	3/8	16	.630	11.5	.453	25.5	1.004	54	2.126	13/16	-	-	-58 ÷ 212	290	29"
2T100063-F	PT20 1/2 3/8 -F	1/2	9.2	.362	3/8	20	.787	11.5	.453	28	1.102	59.4	2.339	13/16	-	-	-58 ÷ 212	290	29"
2T100064-F	PT20 1/2 1/2 -F	1/2	9.2	.362	1/2	20	.787	13.5	.531	31	1.220	59.4	2.339	1	-	-	-58 ÷ 212	290	29"