

PT20 Series D.O.T. Push-in Fittings





800.909.4988
info@rankinusa.com

Material:	Brass	
Working Temperature:	-50 ÷ 100	C°
Working Temperature:	-58 ÷ 212	F°
Working Pressure (max):	20	bar
Working Pressure (max):	290	psi
Vacuum:	-99	kPa
Vacuum:	29"	Hg
Conformity:	RoHS	

Conformity:
Conformity:
Conformity:
Conformity:
Application

Pneumatic circuits for truck and Trailers : Air Suspension, Braking Systems, Transmissions, locking doors and windows, Seat adjustment, Instrumentation, Air conditioning systems, horn, wiper motors, valves, cylinders and accessories

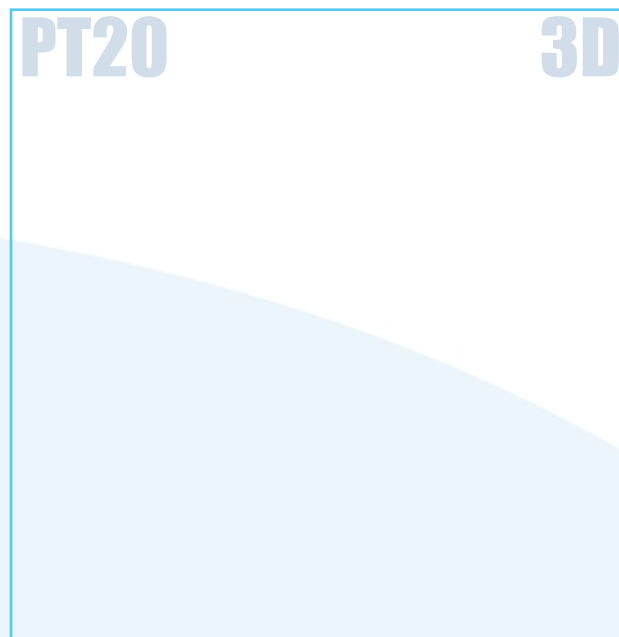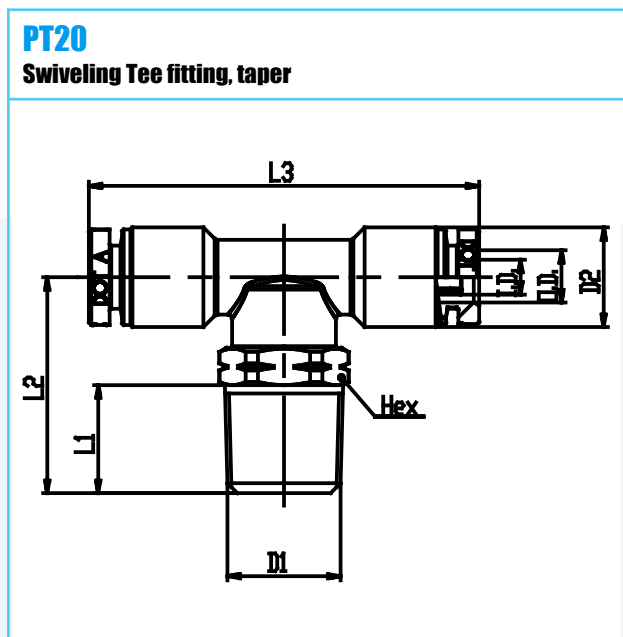

CODE	TYPE	TUBEOD	TUBEID	IDIN	D1NPTF	D2	D2IN	L1	L1IN	L2	L2IN	L3	L3IN	HEX	G	OZ	WTF	WPP	TVH
2T100011	PT20 5/32 1/8	5/32	2.2	.087	1/8	9	.354	8.5	.335	21.2	.835	42	1.654	1/2	-	-	-58 ÷ 212	290	29"
2T100012	PT20 5/32 1/4	5/32	2.2	.087	1/4	9	.354	13	.512	26.2	1.031	42	1.654	9/16	-	-	-58 ÷ 212	290	29"
2T100031	PT20 1/4 1/8	1/4	4.2	.165	1/8	12	.472	8.5	.335	21.2	.835	47	1.85	1/2	34.5	1.217	-58 ÷ 212	290	29"
2T100032	PT20 1/4 1/4	1/4	4.2	.165	1/4	12	.472	13	.512	26.2	1.031	47	1.85	9/16	33.6	1.185	-58 ÷ 212	290	29"
2T100033	PT20 1/4 3/8	1/4	4.2	.165	3/8	12	.472	13	.512	26.7	1.051	47	1.85	11/16	-	-	-58 ÷ 212	290	29"

2T100051	PT20 3/8 1/8	3/8	6.2	.244	1/8	16	.630	8.5	.335	24	.945	54	2.126	11/16	-	-	-58 ÷ 212	290	29"
2T100052	PT20 3/8 1/4	3/8	6.2	.244	1/4	16	.630	13	.512	28.5	1.122	54	2.126	11/16	59.8	2.109	-58 ÷ 212	290	29"
2T100053	PT20 3/8 3/8	3/8	6.2	.244	3/8	16	.630	13	.512	28.5	1.122	54	2.126	11/16	61.2	2.159	-58 ÷ 212	290	29"
2T100054	PT20 3/8 1/2	3/8	6.2	.244	1/2	16	.630	17	.669	34	1.339	54	2.126	7/8	-	-	-58 ÷ 212	290	29"
2T100062	PT20 1/2 1/4	1/2	9.2	.362	1/4	20	.787	13	.512	32	1.260	59.4	2.339	13/16	-	-	-58 ÷ 212	290	29"
2T100063	PT20 1/2 3/8	1/2	9.2	.362	3/8	20	.787	13	.512	32	1.260	59.4	2.339	13/16	90.3	3.185	-58 ÷ 212	290	29"
2T100064	PT20 1/2 1/2	1/2	9.2	.362	1/2	20	.787	17	.669	36.5	1.437	59.4	2.339	7/8	103	3.633	-58 ÷ 212	290	29"