

PT26 Series D.O.T. Push-in Fittings





800.909.4988
info@rankinusa.com

Material:	Brass	
Working Temperature:	-50 ÷ 100	C°
Working Temperature:	-58 ÷ 212	F°
Working Pressure (max):	20	bar
Working Pressure (max):	290	psi
Vacuum:	-99	kPa
Vacuum:	29"	Hg
Conformity:	RoHS	

Conformity:
Conformity:
Conformity:
Conformity:
Application

Pneumatic circuits for truck and Trailers : Air Suspension, Braking Systems, Transmissions, locking doors and windows, Seat adjustment, Instrumentation, Air conditioning systems, horn, wiper motors, valves, cylinders and accessories

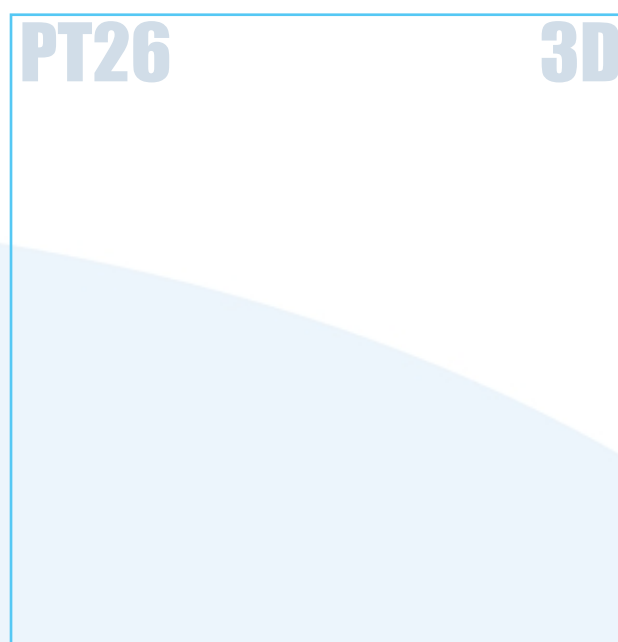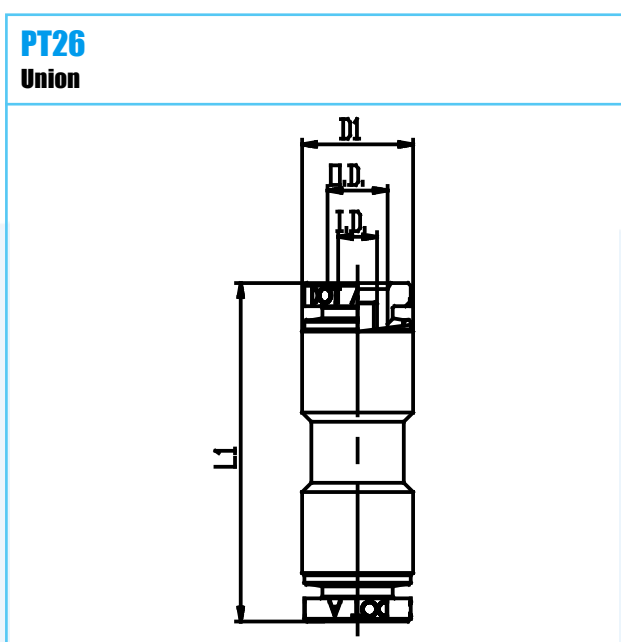

CODE	TYPE	TUBEOD	TUBEID	IDIN	D1	D1IN	L1	L1IN	G	OZ	WTF	WPP	TVH
2T161010	PT26 5/32 5/32	5/32	2.2	.087	9	.354	31	1.22	-	-	-58 ÷ 212	290	29"
2T163030	PT26 1/4 1/4	1/4	4.2	.165	12	.472	33.6	1.323	28.9	1.019	-58 ÷ 212	290	29"
2T165050	PT26 3/8 3/8	3/8	6.2	.244	16	.630	38.6	1.52	31.5	1.111	-58 ÷ 212	290	29"
2T166060	PT26 1/2 1/2	1/2	9.2	.362	20	.787	43.4	1.709	91.1	3.213	-58 ÷ 212	290	29"
2T169090	PT26 5/8 5/8	5/8	11	.433	24	.945	52	2.047	-	-	-58 ÷ 212	290	29"
2T16F0F0	PT26 3/4 3/4	3/4	14.2	.559	28	1.102	57	2.244	-	-	-58 ÷ 212	290	29"