

# PT29 Series D.O.T. Push-in Fittings





800.909.4988  
info@rankinusa.com

<b>Material:</b>	Brass	
<b>Working Temperature:</b>	-50 ÷ 100	C°
<b>Working Temperature:</b>	-58 ÷ 212	F°
<b>Working Pressure (max):</b>	20	bar
<b>Working Pressure (max):</b>	290	psi
<b>Vacuum:</b>	-99	kPa
<b>Vacuum:</b>	29"	Hg
<b>Conformity:</b>	RoHS	

**Conformity:**  
**Conformity:**  
**Conformity:**  
**Conformity:**  
**Application**

Pneumatic circuits for truck and Trailers : Air Suspension, Braking Systems, Transmissions, locking doors and windows, Seat adjustment, Instrumentation, Air conditioning systems, horn, wiper motors, valves, cylinders and accessories

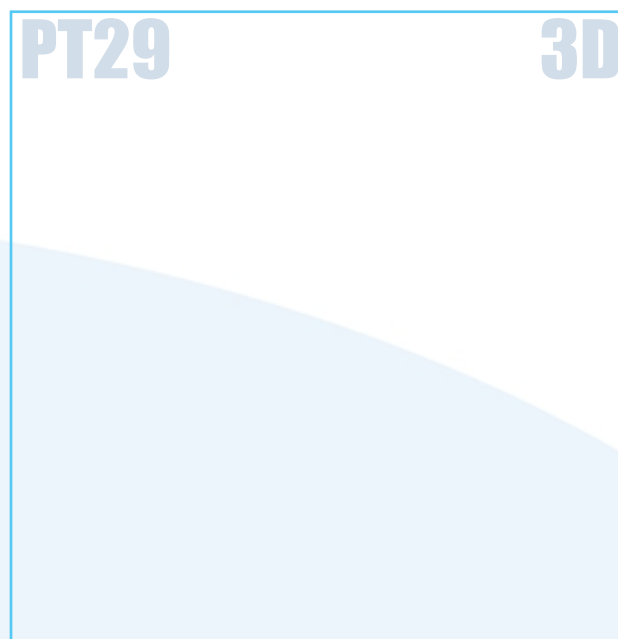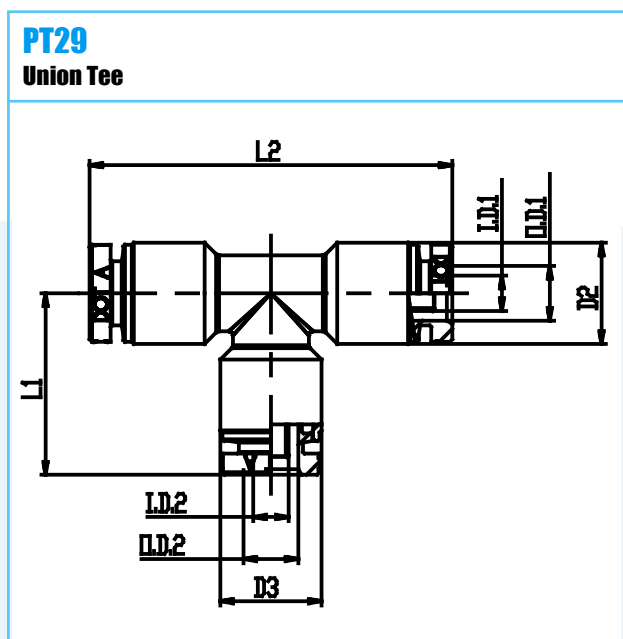

CODE	TYPE	TUBEOD1	TUBEID1	ID1IN	TUBEOD2	TUBEID2	ID2IN	D2	D2IN	D3	D3IN	L1	L1IN	L2	L2IN	G	OZ	WTF	WPP	TVH
2T191010	PT29	5/32	2.2	.087	5/32	2.2	.087	9	.354	9	.354	19	.748	38	1.496	-	-	-58	290	29"
		5/32																+		
		5/32																	212	
2T193030	PT29	1/4	4.2	.165	1/4	4.2	.165	12	.472	12	.472	21.5	.846	43	1.693	25	.882	-58	290	29"
		1/4																+		
		1/4																	212	
2T195030	PT29	3/8	6.2	.244	1/4	4.2	.165	16	.630	12	.472	24	.945	51	2.008	-	-	-58	290	29"
		3/8																+		
		1/4																	212	
2T195050	PT29	3/8	6.2	.244	3/8	6.2	.244	16	.630	16	.630	25.5	1.004	51	2.008	52.5	1.852	-58	290	29"
		3/8																+		
		3/8																	212	
2T196030	PT29	1/2	9.2	.362	1/4	4.2	.165	20	.787	12	.472	26	1.024	56.4	2.22	-	-	-58	290	29"
		1/2																+		
		1/4																	212	

2T196050	PT29	1/2	3/8	1/2	9.2	.362	3/8	6.2	.244	20	.787	16	.630	28	1.102	56.4	2.22	-	-	-58 ÷ 212	290	29"
2T196060	PT29	1/2	1/2	1/2	9.2	.362	1/2	9.2	.362	20	.787	20	.787	27	1.063	56.4	2.22	83.6	2.949	-58 ÷ 212	290	29"
2T199090	PT29	5/8	5/8	5/8	11	.433	5/8	11	.433	24	.945	24	.945	35.5	1.398	71	2.795	-	-	-58 ÷ 212	290	29"