
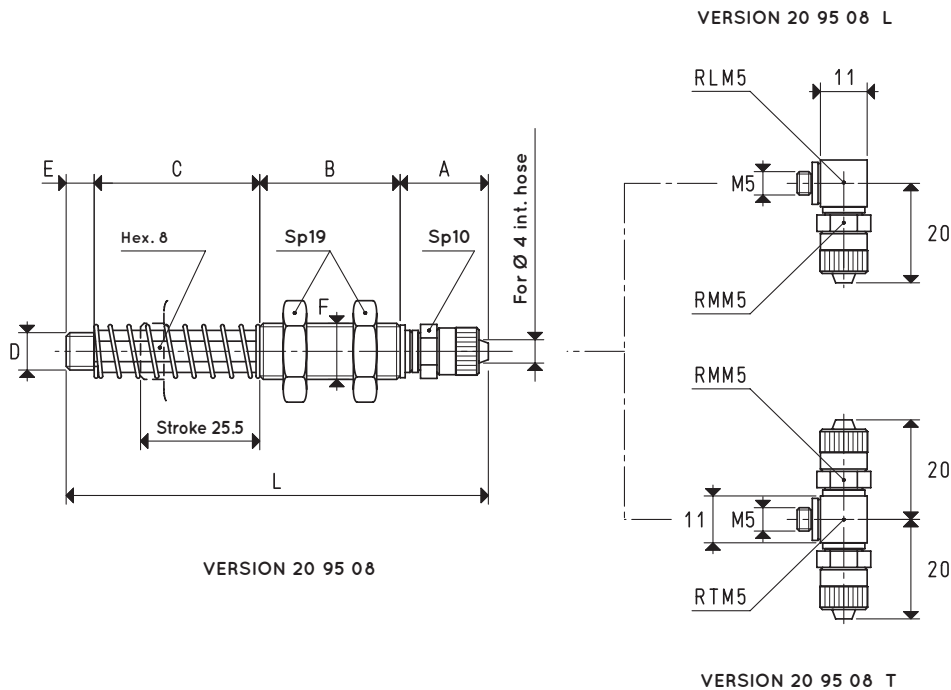


MINI ANTI-ROTATION VACUUM CUP HOLDERS

The technical features are the same as for the mini vacuum cup holders, with their distinctive features being their brass stem with hexagonal section and the steel drive bush with hexagonal hole. This prevents the stem from rotating on its axis, and, as a result, also the cup and its support from rotating.

They are suited for cups with male or female support with diameters ranging from 10 mm to 60 mm, but they have been specially designed for the installation of rectangular, concave and elliptical cups.

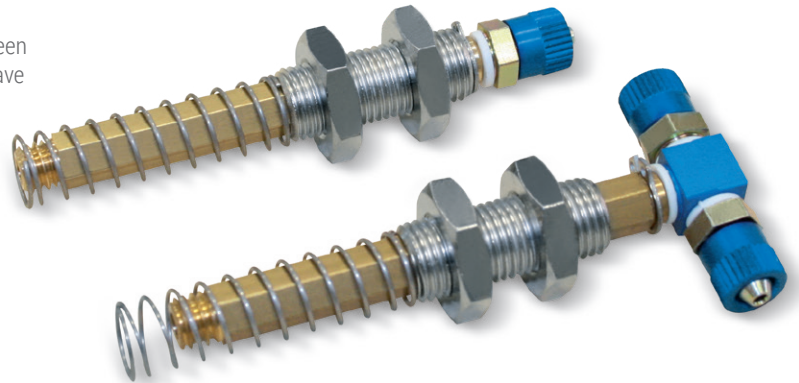

VACUUM CUP HOLDERS WITH STRAIGHT QUICK COUPLER FOR PLASTIC HOSE Ø 4 X 6


Item	A	B	C	D Ø	E	F Ø	L	Weight g
20 95 08	17.5	30	35.5	M8	6	M12 x 1.25	89	58

Note: To order vacuum cup holders with L or T fittings, add the letter L or T to the code.




MINI ANTI-ROTATION VACUUM CUP HOLDERS

3D drawings are available on vuototecnica.net

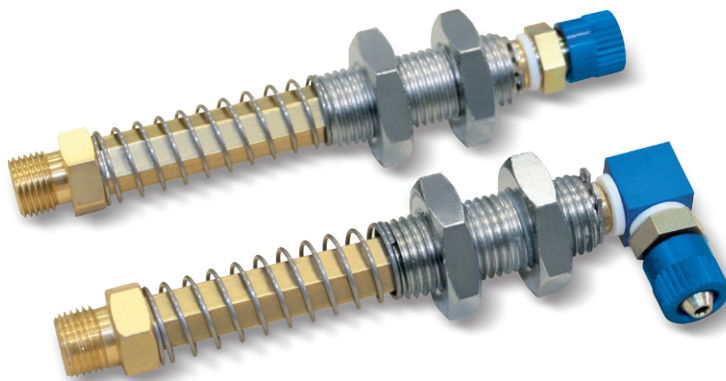

2

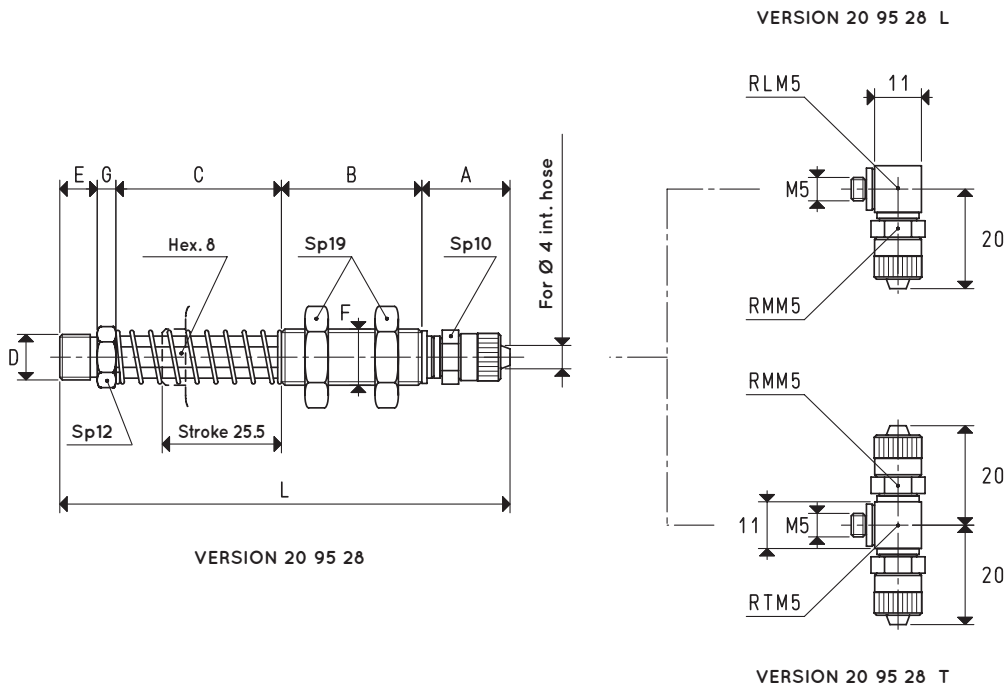



VACUUM CUP HOLDERS WITH STRAIGHT QUICK COUPLER FOR PLASTIC HOSE Ø 4 X 6

Item	A	B	C	D Ø	E	F Ø	G	L	Weight g
20 95 28	17.5	30	35.5	G1/8"	8	M12 x 1.25	5	96	60

Note: To order vacuum cup holders with L or T fittings, add the letter L or T to the code.

Transformation ratio: N (newton) = Kg x 9.81 (force of gravity)

$$\text{inch} = \frac{\text{mm}}{25.4}; \text{pounds} = \frac{\text{g}}{453.6} = \frac{\text{Kg}}{0.4536}$$

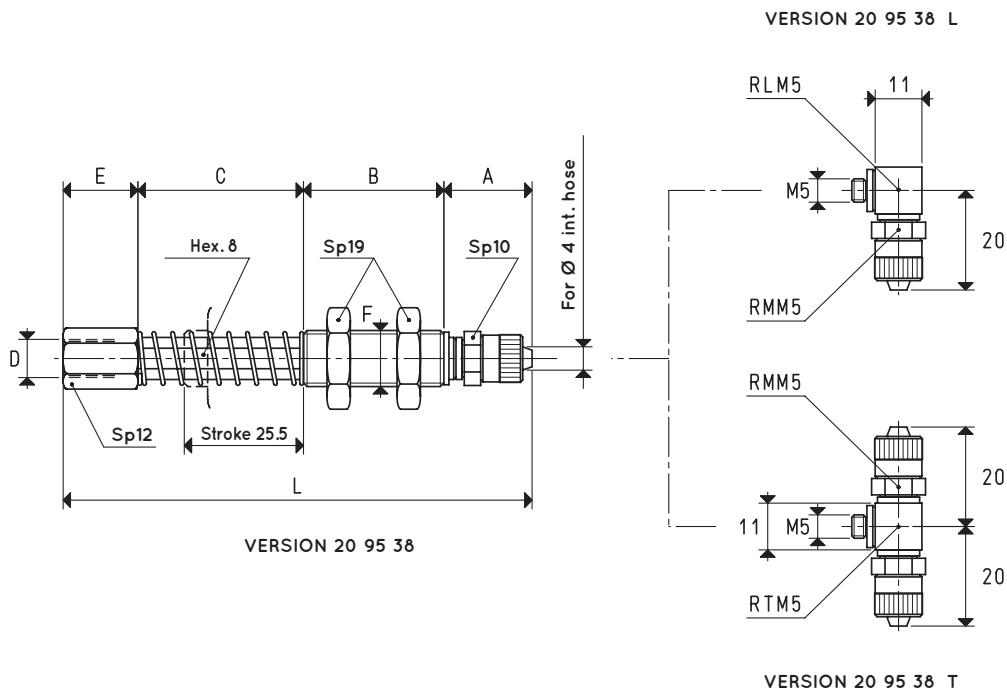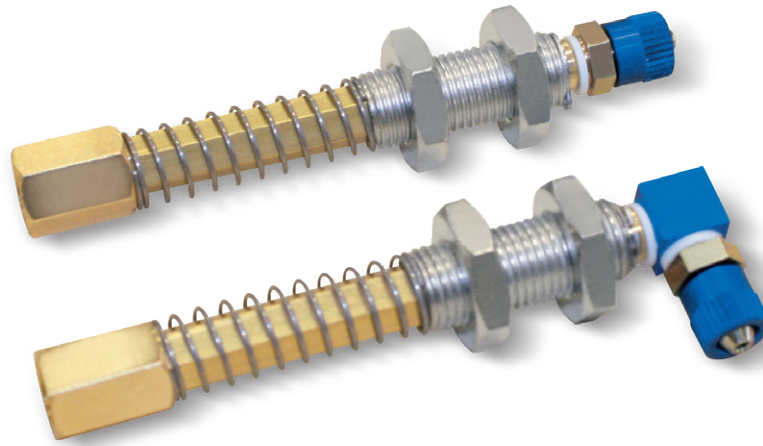

VACUUM CUP HOLDERS WITH STRAIGHT QUICK COUPLER FOR PLASTIC HOSE Ø 4 X 6

Item	A	B	C	D Ø	E	F Ø	L	Weight g
20 95 38	17.5	30	35.5	G1/8"	16	M12 x 1.25	99	68

Note: To order vacuum cup holders with L or T fittings, add the letter L or T to the code.

Transformation ratio: N (newton) = Kg x 9.81 (force of gravity)

inch = $\frac{\text{mm}}{25.4}$; pounds = $\frac{\text{g}}{453.6} = \frac{\text{Kg}}{0.4536}$