




BASIC VACUUM CUP HOLDERS WITH MALE AND FEMALE THREADED CONNECTORS

These basic vacuum cup holders also have the same characteristics and offer the same performance as those previously described. Their distinctive feature is the brass stem with a threaded male or female end for fixing the cup.



The cups to be assembled onto these vacuum cup holders must be equipped with the suited threaded support.

The actual springing stroke is:

- For height C= 28 mm 16 mm
- For height C= 65 mm 49 mm
- For height C= 95 mm 74 mm

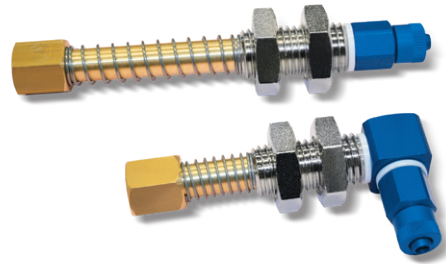

Basic vacuum cup holders with female threaded connectors


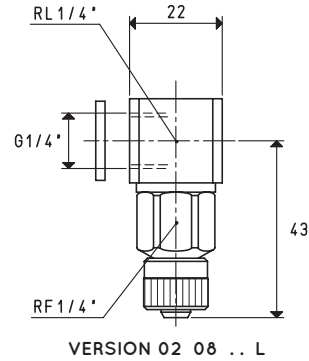
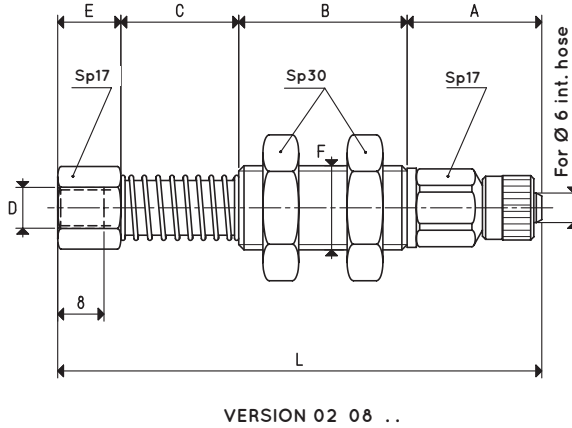


VACUUM CUP HOLDERS WITH STRAIGHT QUICK COUPLER FOR PLASTIC HOSE Ø 6 X 8

Item	A	B	C	D Ø	E	F Ø	L	Weight g
02 08 28	32	40	28	G1/8"	15	M20	115	207
02 08 65	32	40	65	G1/8"	15	M20	152	243
02 08 95	32	40	95	G1/8"	15	M20	182	272

Note: To order vacuum cup holders with L fittings, add the letter L to the code.

Basic vacuum cup holders with male threaded connectors

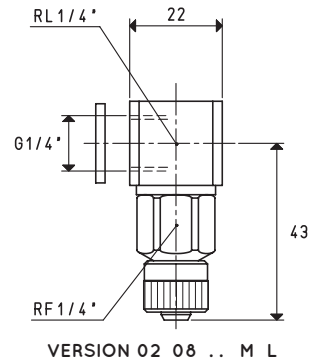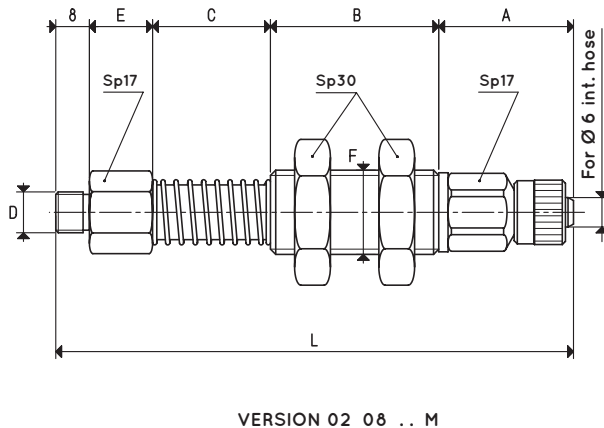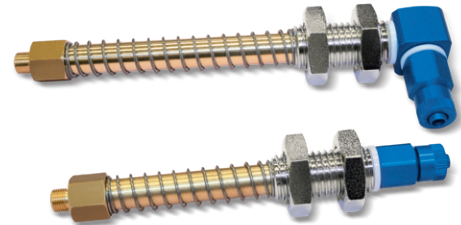

VACUUM CUP HOLDERS WITH STRAIGHT QUICK COUPLER FOR PLASTIC HOSE Ø 6 X 8

Item	A	B	C	D Ø	E	F Ø	L	Weight g
02 08 28 M	32	40	28	G1/8"	15	M20	123	216
02 08 65 M	32	40	65	G1/8"	15	M20	160	252
02 08 95 M	32	40	95	G1/8"	15	M20	190	282

Note: To order vacuum cup holders with L fittings, add the letter L to the code.


Transformation ratio: N (newton) = Kg x 9.81 (force of gravity) inch = $\frac{\text{mm}}{25.4}$; pounds = $\frac{\text{g}}{453.6} = \frac{\text{Kg}}{0.4536}$

BASIC VACUUM CUP HOLDERS WITH MALE AND FEMALE THREADED CONNECTORS




The actual springing stroke is:

- For height C= 28 mm 16 mm
- For height C= 65 mm 49 mm
- For height C= 95 mm 74 mm

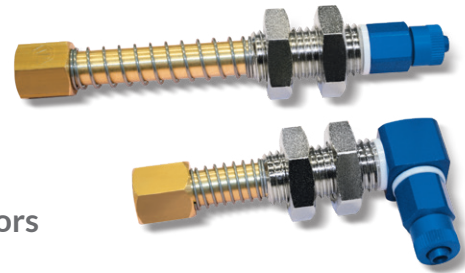

Basic vacuum cup holders with female threaded connectors


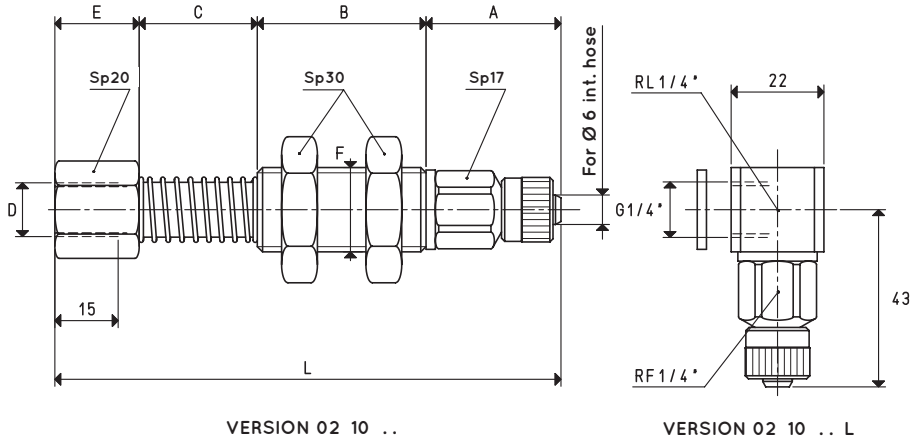


VACUUM CUP HOLDERS WITH STRAIGHT QUICK COUPLER FOR PLASTIC HOSE Ø 6 X 8

Item	A	B	C	D Ø	E	F Ø	L	Weight g
02 10 28	32	40	28	G1/4"	20	M20	120	224
02 10 65	32	40	65	G1/4"	20	M20	157	262
02 10 95	32	40	95	G1/4"	20	M20	187	289

Note: To order vacuum cup holders with L fittings, add the letter L to the code.

Basic vacuum cup holders with male threaded connectors

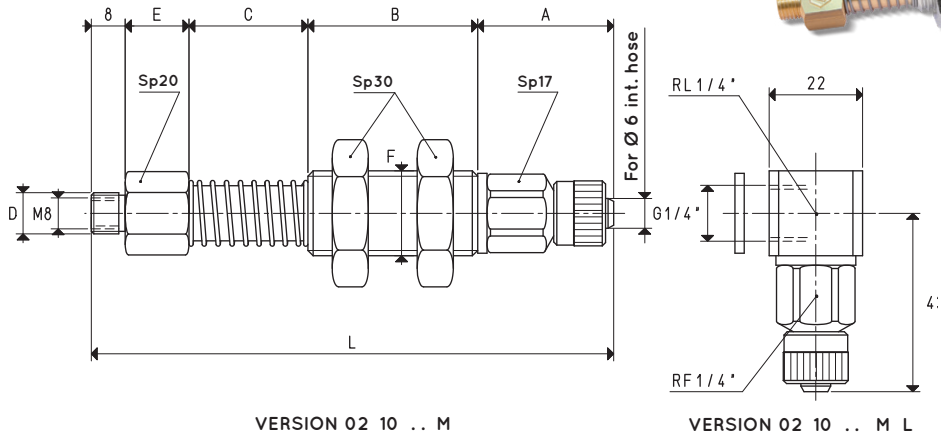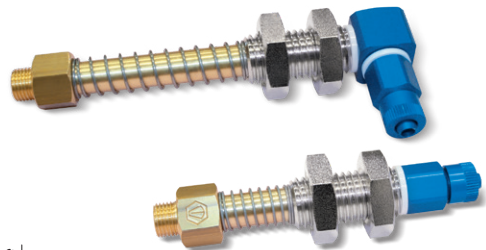

VACUUM CUP HOLDERS WITH STRAIGHT QUICK COUPLER FOR PLASTIC HOSE Ø 6 X 8

Item	A	B	C	D Ø	E	F Ø	L	Weight g
02 10 28 M	32	40	28	G1/4"	15	M20	124	225
02 10 65 M	32	40	65	G1/4"	15	M20	161	266
02 10 95 M	32	40	95	G1/4"	15	M20	191	295

Note: To order vacuum cup holders with L fittings, add the letter L to the code.

Transformation ratio: N (newton) = Kg x 9.81 (force of gravity) inch = $\frac{\text{mm}}{25.4}$; pounds = $\frac{\text{g}}{453.6} = \frac{\text{Kg}}{0.4536}$





BASIC VACUUM CUP HOLDERS WITH MALE AND FEMALE THREADED CONNECTORS

3D drawings are available on vuototecnica.net


The actual springing stroke is:

- For height C= 28 mm 16 mm
- For height C= 65 mm 49 mm
- For height C= 95 mm 74 mm

Basic vacuum cup holders with female threaded connectors

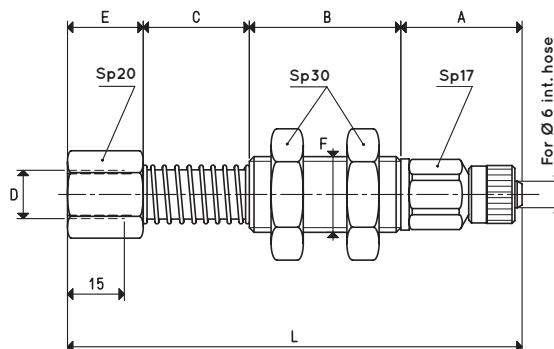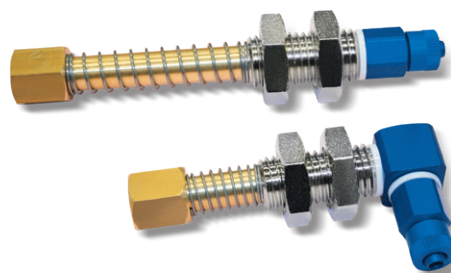

VERSION 02 11 ..





VERSION 02 11 .. L

VACUUM CUP HOLDERS WITH STRAIGHT QUICK COUPLER FOR PLASTIC HOSE Ø 6 X 8


Item	A	B	C	D Ø	E	F Ø	L	Weight g
02 11 28	32	40	28	M12	20	M20	120	226
02 11 65	32	40	65	M12	20	M20	157	264
02 11 95	32	40	95	M12	20	M20	187	291

Note: To order vacuum cup holders with L fittings, add the letter L to the code.

Basic vacuum cup holders with male threaded connectors

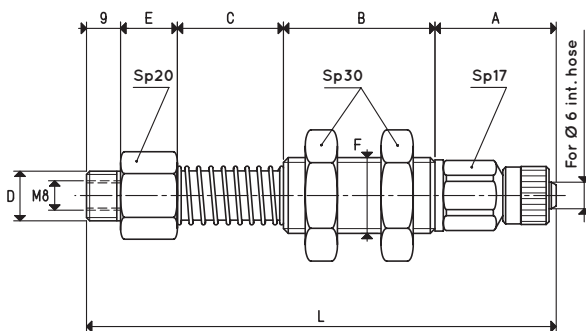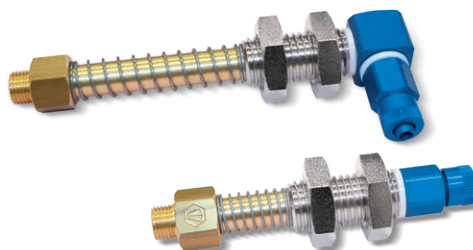

VERSION 02 11 .. M



VERSION 02 11 .. M L

VACUUM CUP HOLDERS WITH STRAIGHT QUICK COUPLER FOR PLASTIC HOSE Ø 6 X 8

Item	A	B	C	D Ø	E	F Ø	L	Weight g
02 11 28 M	32	40	28	M12	15	M20	124	223
02 11 65 M	32	40	65	M12	15	M20	161	264
02 11 95 M	32	40	95	M12	15	M20	191	293

Note: To order vacuum cup holders with L fittings, add the letter L to the code.

Transformation ratio: N (newton) = Kg x 9.81 (force of gravity)

inch = $\frac{\text{mm}}{25.4}$; pounds = $\frac{\text{g}}{453.6} = \frac{\text{Kg}}{0.4536}$



BASIC VACUUM CUP HOLDERS WITH MALE AND FEMALE THREADED CONNECTORS



The actual springing stroke is:

- For height C= 28 mm 16 mm
- For height C= 65 mm 49 mm
- For height C= 95 mm 74 mm

Basic vacuum cup holders with female threaded connectors

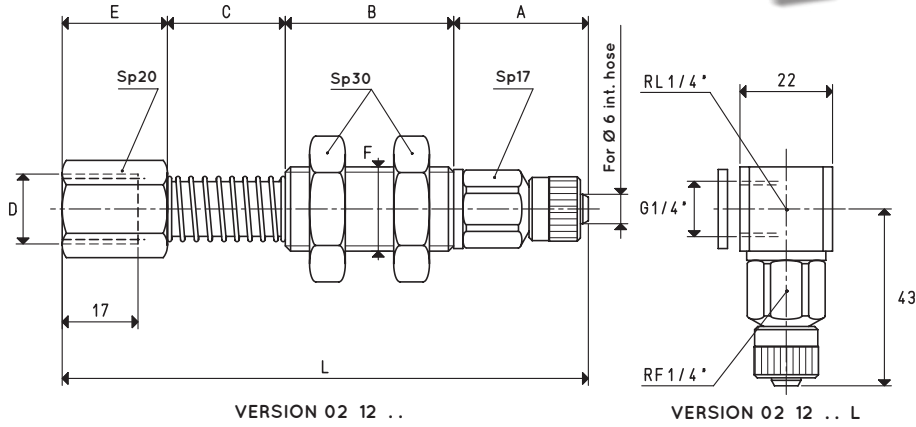
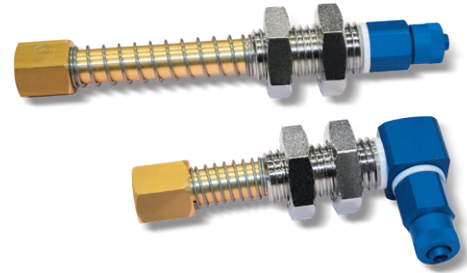


VACUUM CUP HOLDERS WITH STRAIGHT QUICK COUPLER FOR PLASTIC HOSE Ø 6 X 8

Item	A	B	C	D Ø	E	F Ø	L	Weight g
02 12 28	32	40	28	G3/8"	25	M20	125	220
02 12 65	32	40	65	G3/8"	25	M20	162	259
02 12 95	32	40	95	G3/8"	25	M20	192	285

Note: To order vacuum cup holders with L fittings, add the letter L to the code.

Basic vacuum cup holders with male threaded connectors

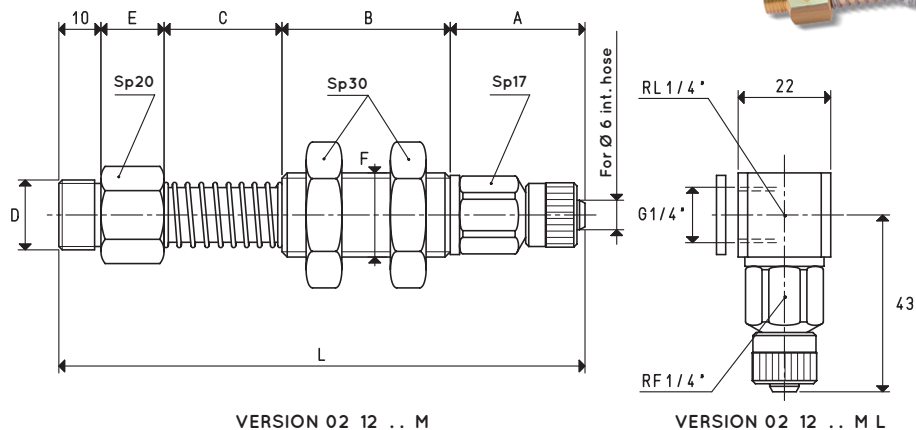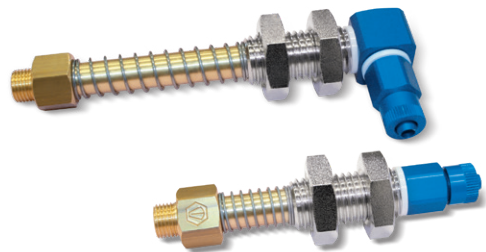

VACUUM CUP HOLDERS WITH STRAIGHT QUICK COUPLER FOR PLASTIC HOSE Ø 6 X 8

Item	A	B	C	D Ø	E	F Ø	L	Weight g
02 12 28 M	32	40	28	G3/8"	15	M20	125	237
02 12 65 M	32	40	65	G3/8"	15	M20	162	274
02 12 95 M	32	40	95	G3/8"	15	M20	192	303

Note: To order vacuum cup holders with L fittings, add the letter L to the code.

Transformation ratio: N (newton) = Kg x 9.81 (force of gravity) inch = $\frac{\text{mm}}{25.4}$; pounds = $\frac{\text{g}}{453.6} = \frac{\text{Kg}}{0.4536}$